Read before installation.

All bolts have to be finaly tighten after installation all parts on vehicle.

Soft luggage rack

BMW 900 GS

ID:3058457

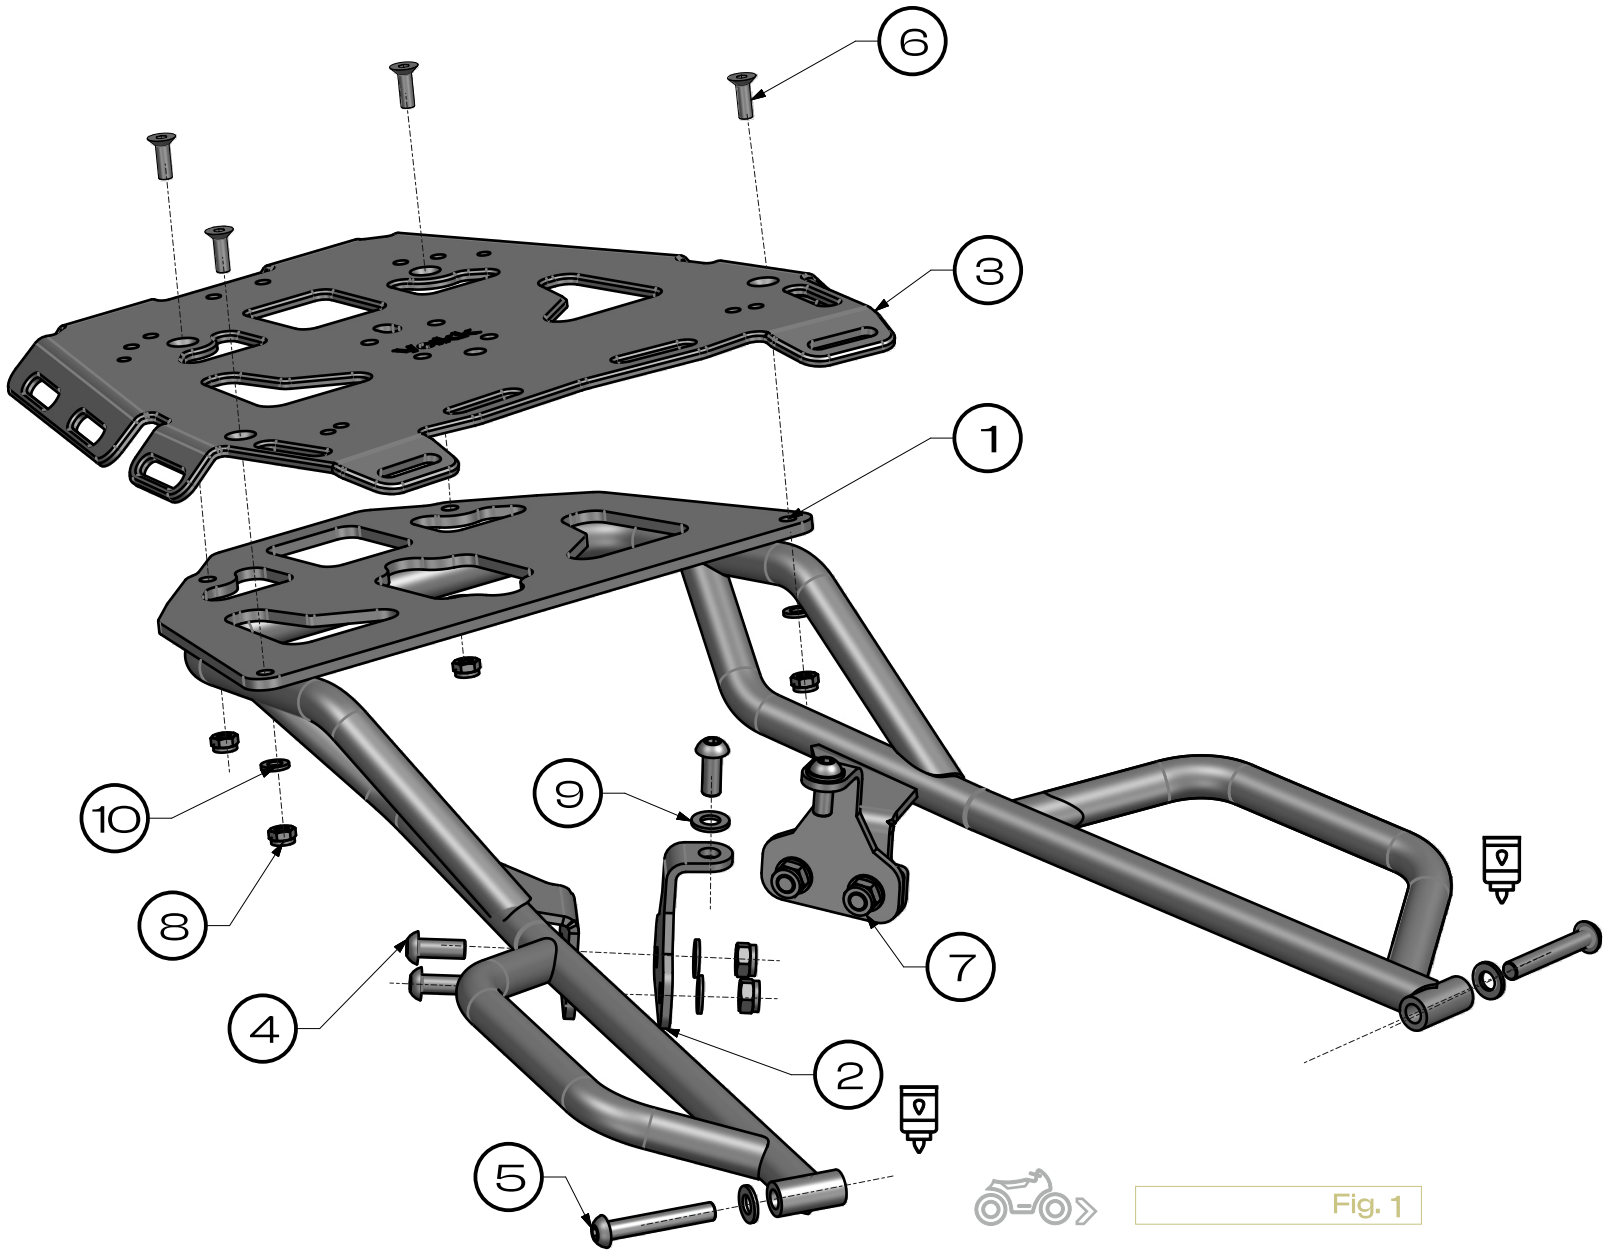


Fig. 1

1	Top case rack	1x
2	Bracket	2x
3	Luggage	1x
4	Bolt M8x20-DIN 7380	6x
5	Bolt M8x50-DIN 7380	2x
6	Bolt M6x18-DIN 7991	4x
7	Nut M8-DIN 985	4x
8	Nut M6-DIN 985	4x
9	Washer M8-DIN 125	8x
10	Washer M6-DIN 125	4x

one person | use a medium-stregth | tighten with torque | OEM Original Equipment Manufacturer

!!! Initially, attach the screws loosely. After assembling everything together, tighten them with the appropriate force.

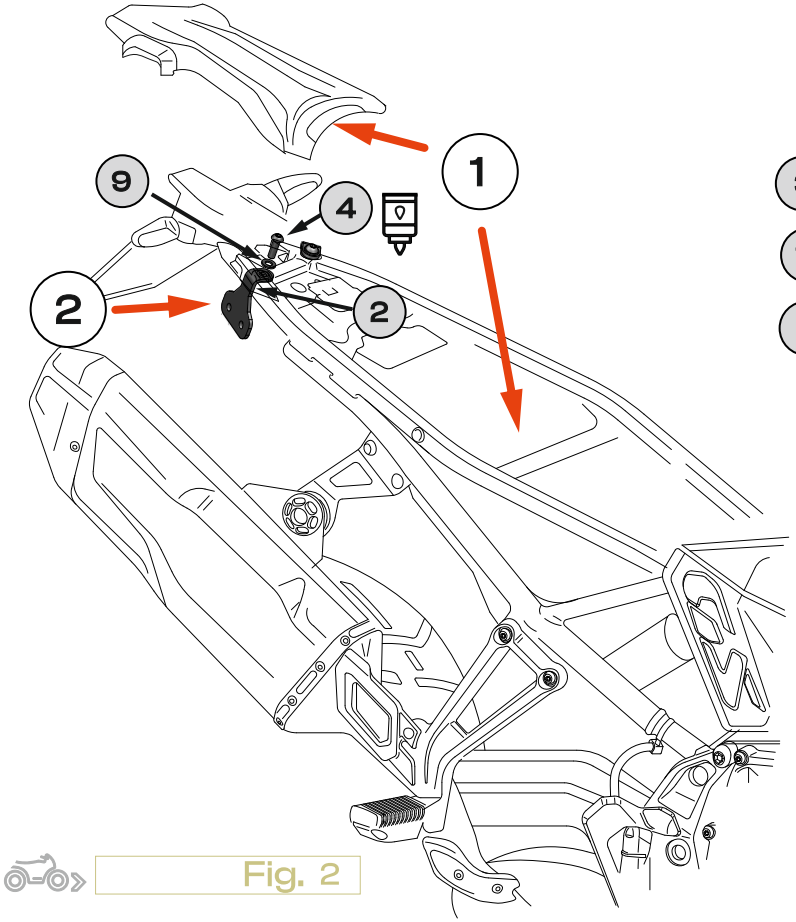


Fig. 2

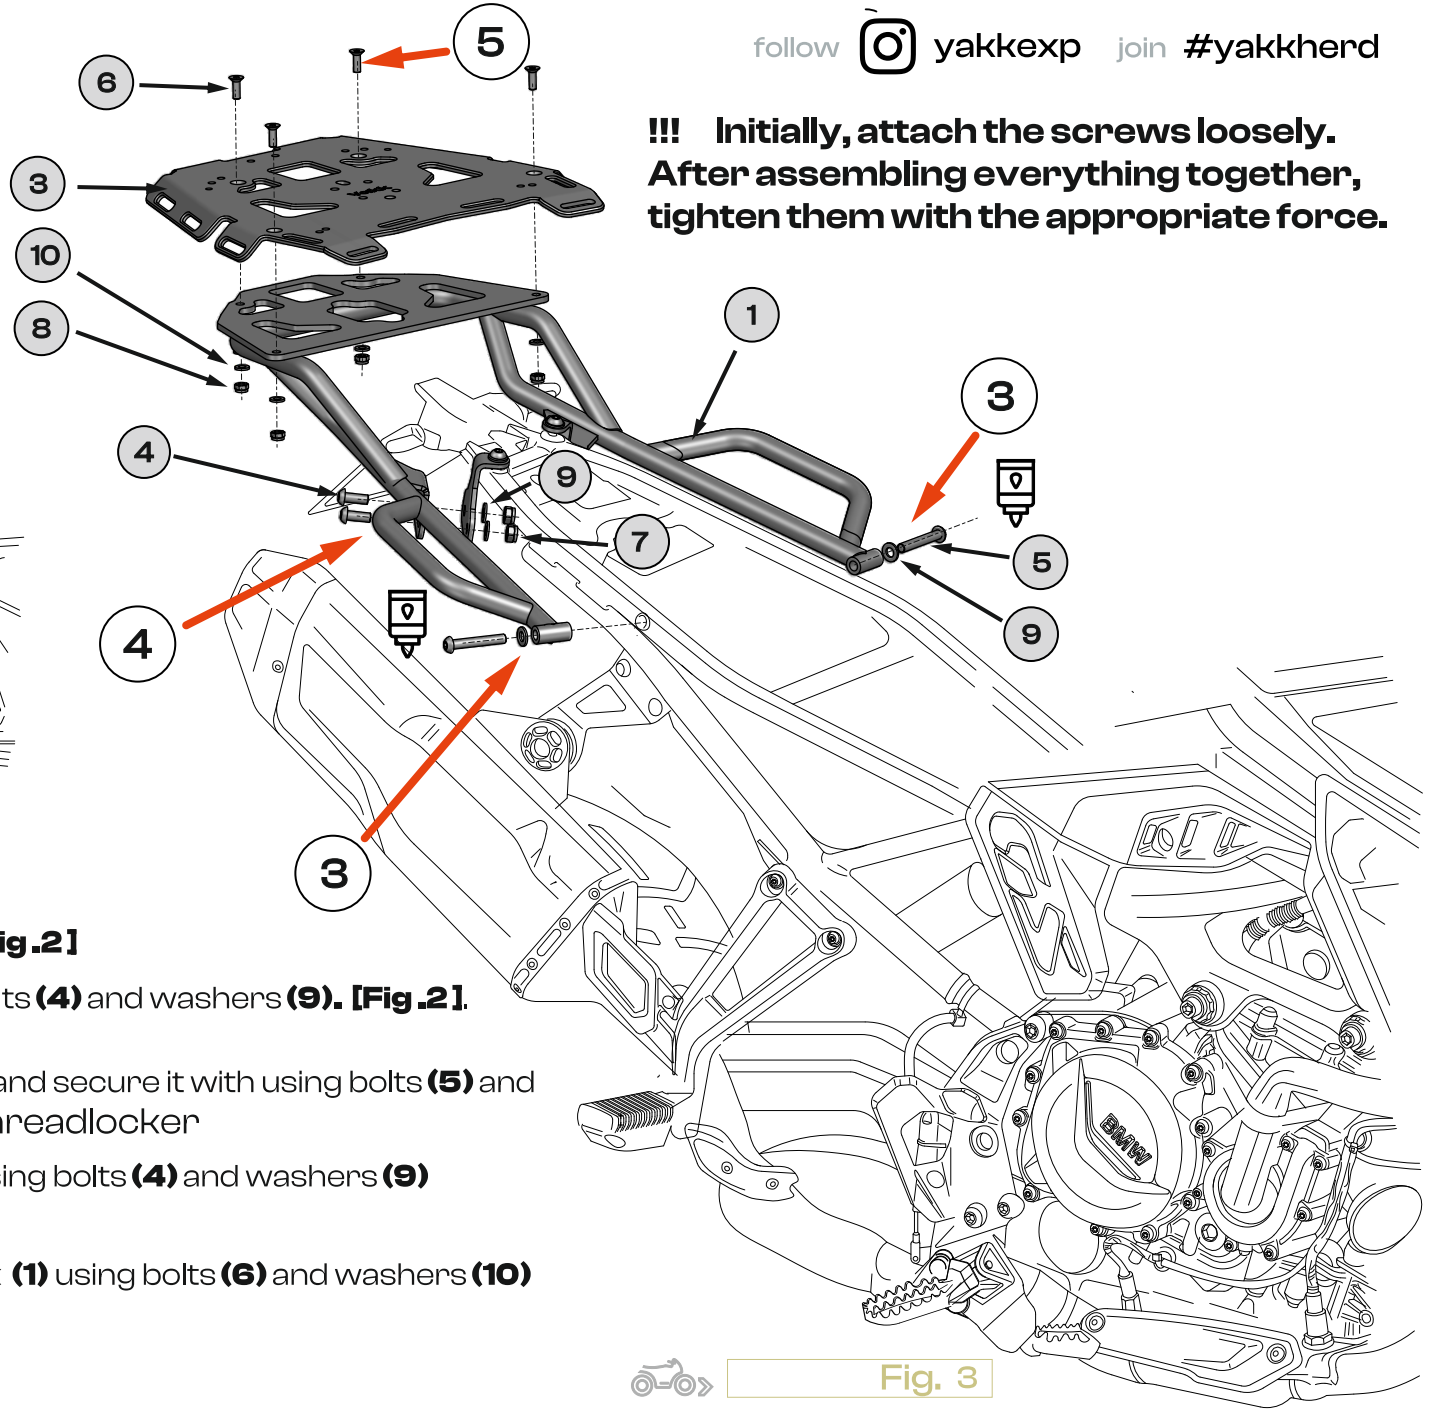


Fig. 3

1. Remove the seat, the plastic side cover **(OEM). [Fig .2]**
2. Install the bracket **(7)** to the motorcycle using bolts **(4)** and washers **(9). [Fig .2]**.
3. Position the Top case rack **(1)** to the motorcycle and secure it with using bolts **(5)** and washer **(9). [Fig .3]**. Use a medium-strength threadlocker
4. Fasten the Top case rack **(1)** to the bracket **(2)** using bolts **(4)** and washers **(9)** and nuts **(7)** . **[Fig .3]**.
5. Mount the Luggage plate **(3)** to the Top case rack **(1)** using bolts **(6)** and washers **(10)** and nuts **(8)** . **[Fig .3]**.
6. Reinstall the seat and the OEM plastic side cover.